



1/3" B&W ULTRA MINIATURE CAMERA

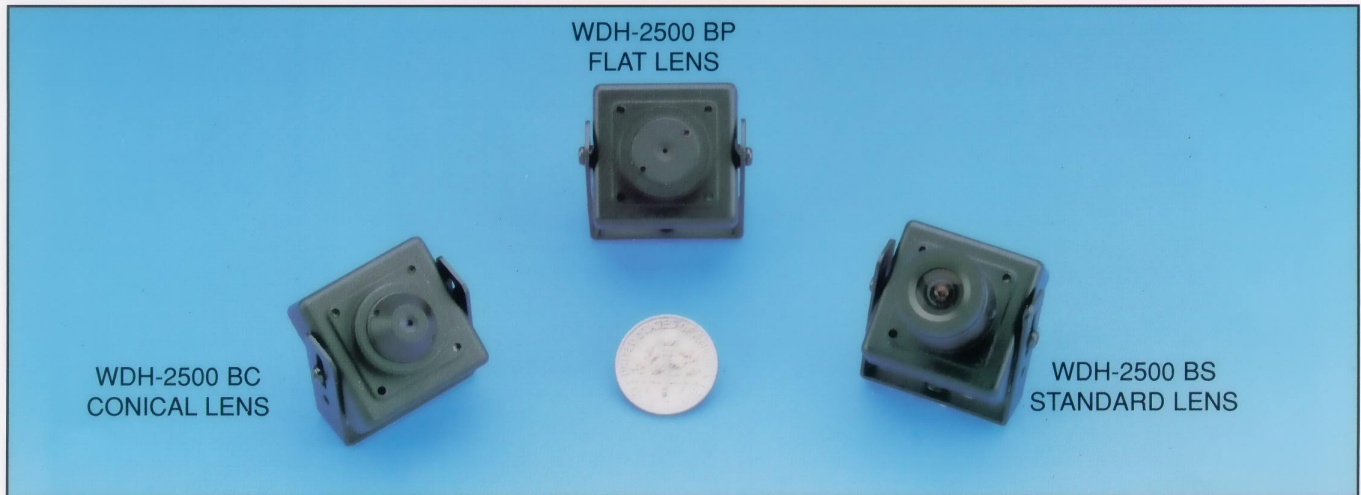

- ULTRA COMPACT MINIATURE CAMERA
- EXTREMELY LOW POWER CONSUMPTION - 80mA
- 0.03 Lux MIN. ILLUMINATION
- 430 LINES OF RESOLUTION
- METAL HOUSING WITH MOUNTING BRACKET AND RCA & POWER CORD

1/4" DIGITAL COLOR ULTRA MINIATURE CAMERA

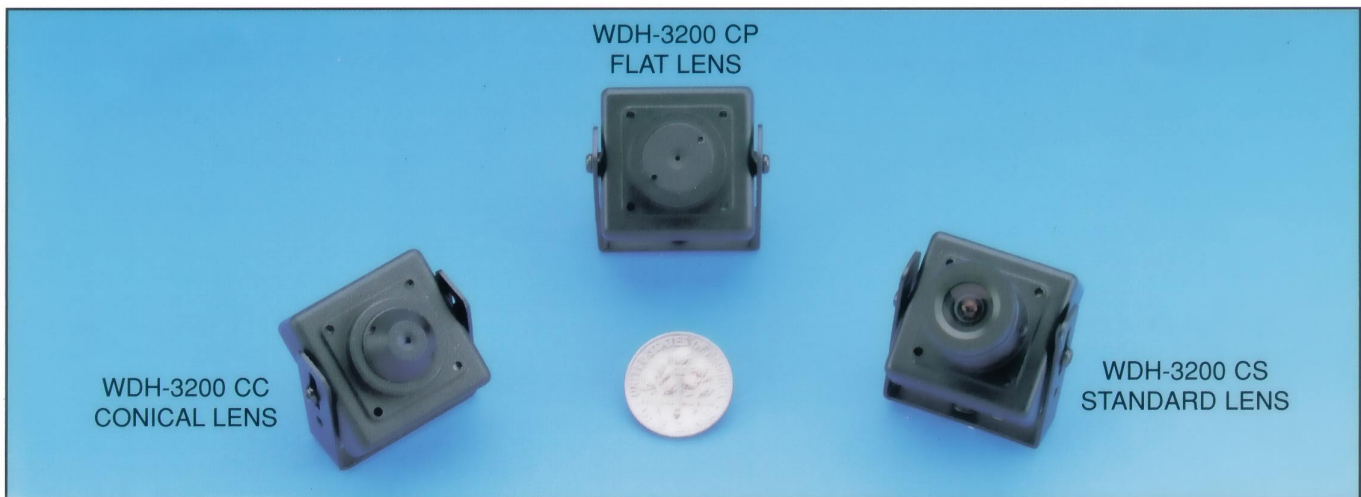

- ULTRA COMPACT MINIATURE CAMERA
- EXTREMELY LOW POWER CONSUMPTION - 100mA
- 0.5 Lux MIN. ILLUMINATION
- 420 LINES OF RESOLUTION
- METAL HOUSING WITH MOUNTING BRACKET AND RCA & POWER CORD

SPECIFICATIONS

CCD MINIATURE CAMERAS

B&W ULTRA MINIATURE CAMERAS

IMAGE PICK-UP DEVICE.....	1/3" CCD AREA SENSOR
PICTURE ELEMENTS.....	EIA = 512(H) X 492(V)
PIXEL PITCH.....	EIA = 9.6UM(H) X 7.5UM(V)
SCANNING SYSTEM.....	2:1 INTERLACE
SCANNING FREQUENCY.....	EIA = 525 LINES, 60 FIELD/SEC.(II) 15.750KHZ X 60HK
RESOLUTION.....	430 LINES
MINIMUM ILLUMINATION.....	0.03 LUX
S/N RATIO.....	45dB
LENS MOUNTING.....	3.6MM, 4.3MM, 5.0MM AND OTHER LENS AVAILABLE
VIDEO OUTPUT.....	1.0 VP-P / 75 OHM COMPOSITE SIGNAL
POWER REQUIREMENT.....	8-12 VDC (9VDC STANDARD)
POWER CONSUMPTION.....	80 mA
OPERATING TEMPERATURE....	-20 Deg to +70 Deg C, RH 95% MAX
STORAGE TEMPERATURE.....	-40 Deg to +85 Deg C, RH 95% MAX
AUDIO PICKUP SENSITIVITY...	-60 DB (0 DB = 1B/UBAR. 1KNZ)
AUDIO FREQUENCY RANGE....	20 HZ TO 20 KHZ
AUDIO S/N LEVEL.....	MORE THAN 35 DB
AUDIO OUTPUT LEVEL.....	1 VP-P/600 OHM

DIMENSIONS FOR B&W BOARD CAMERAS

WDH-2500BP	25MM (L) X 25MM (W) X 15MM (D)
WDH-2500BC	25MM (L) X 25MM (W) X 16MM (D)
WDH-2500BS	25MM (L) X 25MM (W) X 30MM (D)

DIGITAL COLOR ULTRA MINIATURE CAMERA

IMAGE SENSOR.....	INTERLINE TRANSFER COLOR 1/4" FORMAT
EFFECTIVE PIXEL.....	512 (H) X 492 (V) PIXELS/NTSC
	512 (H) X 582 (V) PIXELS/PAL
SCANNING SYSTEM.....	2 : 1 INTERLACED
SYNC SYSTEM.....	INTERNAL SYNC
RESOLUTION.....	420 LINES
S/N RATIO.....	MORE THAN 46dB (typ)
GAMMA CHARACTERISTIC....	0.45
MINIMUM ILLUMINATION.....	0.5 LUX
VIDEO OUTPUT.....	COMPOSITE VIDEO SIGNAL:1.0 VP-P
WHITE BALANCE.....	AUTO WHITE BALANCE
ELECTRONIC SHUTTER.....	1/60 - 1/100,000 SEC (N)
	1/50 - 1/100,000 SEC (P)
POWER REQUIREMENT.....	9-12 VDC
POWER CONSUMPTION.....	100 mA
LENS.....	3.6MM, 4.3MM AND OTHER LENS AVAILABLE

DIGITAL COLOR MINIATURE CAMERA

WDH-3200CP	PINHOLE LENS
WDH-3200CC	CONICAL LENS
WDH-3200CS	STANDARD LENS



303 West Main Street • Freehold • NJ • 07728 • Tel. (888) 810-6060 • Fax. (732) 462-0511

www.acisecurity.com