



Features


- 10" CRT, 0.63mm stripe pitch, 90° deflection
- 2 Video input line loop through (A/B)
- Automatic 75 Ohm termination
- World wide Multiple system (NTSC/PAL)
- Designed for general purpose monitoring in CCTV applications
- Horizontal resolution: 280 TV lines
- Metal Cabinet
- Menu control (On-screen display)
- Audio out: 0.8W

Specifications

MODEL	SMC-100
System	NTSC/PAL
Picture Tube	10 Inch CRT, 0.63mm stripe pitch, 90° deflection Visible picture size 22.8 cm (9 inch) measured diagonally
Horizontal Resolution	More than 280 TV lines
Video Input	Composite 1 Vp-p
Subcarrier Frequency	3.579545 MHz ± 500 Hz (room temperature, NTSC)
Sync. Range	4.433618 MHz ± 500 Hz (room temperature, PAL)
Horizontal Frequency Stability	15.750 KHz ± 500 Hz (NTSC) 15.625 KHz ± 500 Hz (PAL)
Vertical Frequency Stability	60 Hz ± 5 Hz (NTSC) 50 Hz ± 5 Hz (PAL)
High Voltage	18 kV ± 1.0kV
Power Consumption	50 Watts (Maximum)
Power	100V ~ 230V. 50/60 Hz
Dimensions (W x H x D)	10.4" x 10.2" x 13" (265mm x 260mm x 330mm)
Operating Humidity	0-90%
Operating Temperature	0 - 40°C (32 - 104°F)
Audio In A/B	Phono, -5bDu, High impedance
Audio Out	0.8 W
Weight	Approximately 15.4 lbs (7 Kg)

- 0 dBu = 0.775 Vrms
- 75 Ohm termination is automatically set to off when connection is made to the OUT connector

Panel

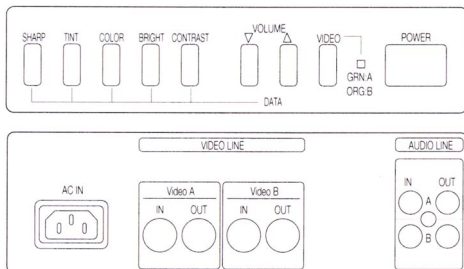

Dimensions

