

### Features


- 10" CRT, 0.63mm stripe pitch, 90° deflection
- Horizontal resolution: 280 TV lines
- Auto sequential switching function
- Auto skip & time adjustment
- World wide multiple system (NTSC/PAL)
- Monitor, audio out
- Metal Cabinet
- Menu control (On-screen display)
- Audio out: 0.8W
- Preset

### Specifications

MODEL	SMC-102
System	NTSC/PAL
Picture Tube	10 Inch CRT, 0.63mm stripe pitch, 90° deflection Visible picture size 22.8 cm (9 inch) measured diagonally
Horizontal Resolution	More than 280 TV lines
Video Input	Composite 1 Vp-p
Subcarrier Frequency Sync. Range	3.579545 MHz ± 500 Hz (room temperature, NTSC) 4.433618 MHz ± 500 Hz (room temperature, PAL)
Horizontal Frequency Stability	15.750 KHz ± 500 Hz (NTSC) 15.625 KHz ± 500 Hz (PAL)
Vertical Frequency Stability	60 Hz ± 5 Hz (NTSC) 50 Hz ± 5 Hz (PAL)
High Voltage	18 kV ± 1.0kV
Power Consumption	50 Watts (Maximum)
Power	100V ~ 230V. 50/60 Hz
Dimensions (W x H x D)	10.4" x 10.2" x 13" (265mm x 260mm x 330mm)
Operating Humidity	0-90%
Operating Temperature	0 - 40°C (32 - 104°F)
Audio Input 1/2/3/4	Phono, -5bDu, High impedance
Audio Out	0.8 W
Weight	Approximately 15.4 lbs (7 Kg)

• 0 dBu = 0.775 Vms

### Panel

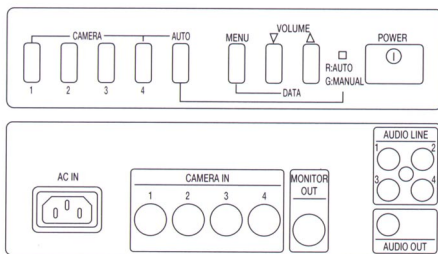

### Dimensions

