

Features


- 14" CRT, 0.66mm stripe pitch, 90° deflection
- 2 Video input line loop through (A/B)
- Automatic 75 Ohm termination
- World wide multiple system (NTSC/PAL)
- Designed for general purpose monitoring in CCTV applications
- Horizontal resolution: 360 TV lines
- Metal Cabinet
- Menu control (On-screen display)
- Audio out: 1.0W

Specifications

MODEL	SMC-140
System	NTSC/PAL
Picture Tube	14 Inch CRT, 0.66mm stripe pitch, 90° deflection Visible picture size 33.7 cm (13") measured diagonally
Horizontal Resolution	More than 360 TV lines
Input Signal	Composite 1 Vp-p
Subcarrier Frequency	3.579545 MHz ± 500 Hz (room temperature, NTSC)
Sync. Range	4.433618 MHz ± 500 Hz (room temperature, PAL)
Horizontal Frequency Stability	15.750 KHz ± 500 Hz (NTSC) 15.625 KHz ± 500 Hz (PAL)
Vertical Frequency Stability	60 Hz ± 5 Hz (NTSC) 50 Hz ± 5 Hz (PAL)
High Voltage	24 kV ± 1.0kV
Power Consumption	60 Watts (Maximum)
Power	100V ~ 230V. 50/60 Hz
Dimensions (W x H x D)	14.4" x 13.4" x 15.4" (365mm x 342mm x 391mm)
Operating Humidity	0-90%
Operating Temperature	0 - 40°C (32 - 104°F)
Audio Input A/B	Phono, -5bDu, High impedance
Audio Out	1.0 W
Weight	Approximately 26.4 lbs (12 Kg)

- 0 dBu = 0.775 Vrms
- 75 Ohm termination is automatically set to off when connection is made to the OUT connector

Panel

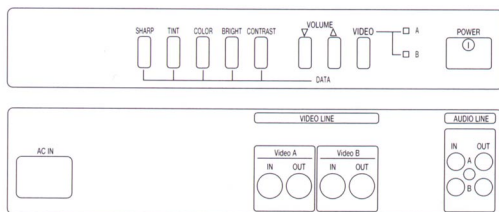

Dimensions

