

Specifications


MODEL	SMC-142
System	NTSC/PAL
Picture Tube	14 Inch CRT, 0.66mm stripe pitch, 90° deflection Visible picture size 33.7 cm (13") measured diagonally
Horizontal Resolution	More than 360 TV lines
Video Input	Composite 1 Vp-p
Subcarrier Frequency	3.579545 MHz ± 500 Hz (room temperature, NTSC)
Sync. Range	4.433618 MHz ± 500 Hz (room temperature, PAL)
Horizontal Frequency Stability	15.750 KHz ± 500 Hz (NTSC) 15.625 KHz ± 500 Hz (PAL)
Vertical Frequency Stability	60 Hz ± 5 Hz (NTSC) 50 Hz ± 5 Hz (PAL)
High Voltage	24 kV ± 1.0kV
Power Consumption	60 Watts (Maximum)
Power	100V ~ 230V. 50/60 Hz
Dimensions (W x H x D)	14.4" x 13.4" x 15.4" (365mm x 342mm x 391mm)
Operating Humidity	0-90%
Operating Temperature	0 - 40°C (32 - 104°F)
Audio Input 1/2/3/4	Phono, -5bDu, High impedance
Audio Out	1.0 W
Weight	Approximately 26.4 lbs (12 Kg)

Features

- 14" CRT, 0.66mm stripe pitch, 90° deflection
- Horizontal resolution: 360 TV lines
- Auto sequential switching function
- Auto skip & time adjustment
- World wide multiple system (NTSC/PAL)
- Monitor, audio out
- Metal Cabinet
- Menu control (On-screen display)
- Audio out: 1.0 W
- Preset

• 0 dBu = 0.775 Vrms

Panel

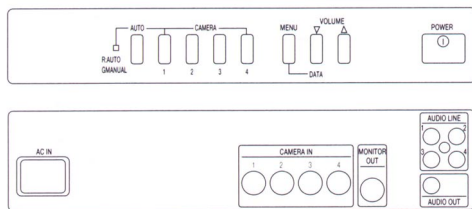

Dimensions

