



### Features


- High resolution monitor
- 15" CRT, 0.28mm Dot pitch, 90° deflection
- Horizontal resolution: 650 TV lines
- 2 composite and 1 Y/C video input
- Loop through, automatic 75 ohm termination
- World wide multiple system (NTSC/PAL)
- Beam current feedback circuit for color balance stability
- Metal Cabinet
- Menu control (On-screen display)
- Audio out: 1.0 W
- Comb filter internal
- FCC, UL, CSA, CE

### Specifications

<b>MODEL</b>	<b>SMP-150</b>
<b>System</b>	NTSC/PAL
<b>Picture Tube</b>	15 Inch CRT, 0.28mm Dot pitch, 90° deflection Visible picture size 36 cm (14") measured diagonally
<b>Horizontal Resolution</b>	More than 650 TV lines
<b>Video Input A/B</b>	Loop-through BNC Composite 1 Vp-p, sync. Negative Automatic 75 Ohm termination
<b>Input C</b>	Loop-through Mini-Din 4-pin Y:1Vp-p, sync negative Automatic 75 ohm termination C:0.286Vp-p(NTSC)/0.3Vp-p(PAL), Auto 75 ohm term.
<b>Subcarrier Frequency Sync. Range</b>	3.579545 MHz ± 500 Hz (room temperature, NTSC) 4.433618 MHz ± 500 Hz (room temperature, PAL)
<b>Horizontal Frequency Stability</b>	15.750 KHz ± 500 Hz (NTSC) 15.625 KHz ± 500 Hz (PAL)
<b>Vertical Frequency Stability</b>	60 Hz ± 5 Hz (NTSC) 50 Hz ± 5 Hz (PAL)
<b>High Voltage</b>	25 kV ± 1.5kV
<b>Convergence</b>	Less than 0.3mm (at the center of display area)
<b>Power Consumption</b>	72 Watts (Maximum)
<b>Power Requirements</b>	100V ~ 230V. 50/60 Hz
<b>Dimensions (W x H x D)</b>	14.4" x 13.4" x 15.4" (365mm x 341mm x 391mm)
<b>Operating Humidity</b>	0-90%
<b>Operating Temperature</b>	0 - 40°C (32 - 104°F)
<b>Audio Input A/B/C</b>	Phono, -5bDu, High impedance
<b>Audio Out</b>	1.0 W
<b>Weight</b>	Approximately 20.8 lbs (14 Kg)

- 0 dBu = 0.775 Vrms
- 75 ohm termination is automatically set to off when connection is made to the OUT connector

### Panel

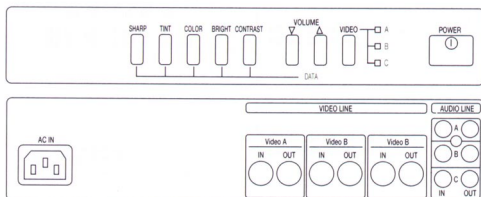

### Dimensions

